

Distributed by:



JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 222826 (205210-3)

LOC	DIST	P	F	REVISIONS			
				ZONE	LTR	DESCRIPTION	DATE
BD	48				E4	REV. & REDRAWN ECN-1119	7-18-85
					F	REVISED PER ECN BD6802	12/03/92
					F1	ADDED -6 PER NPR 4837	06/14/93
					G	OBS -6 PER 0420-141-96	06 OCT 97

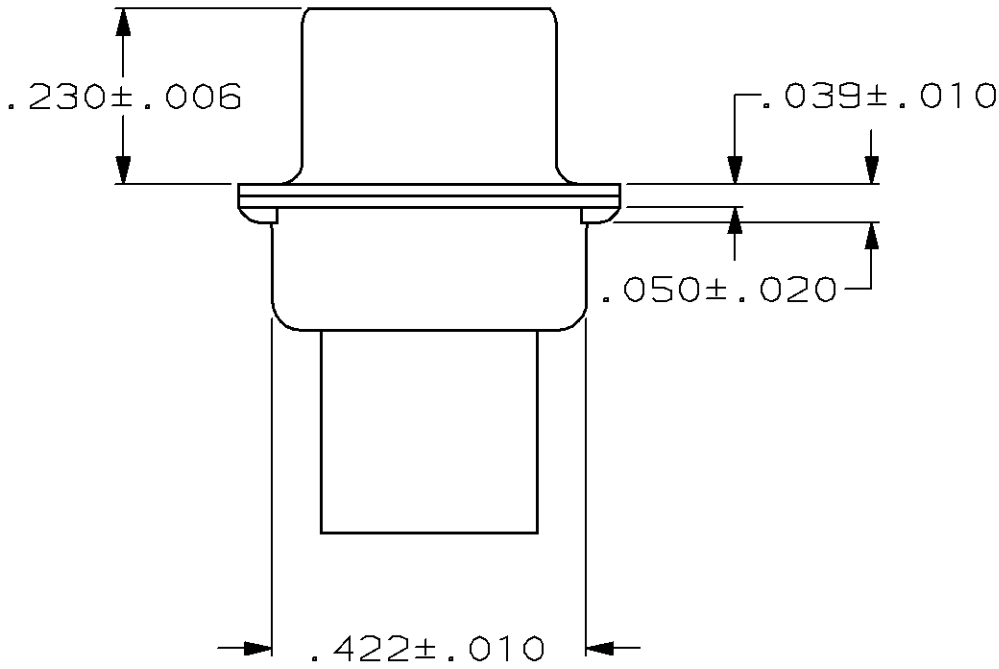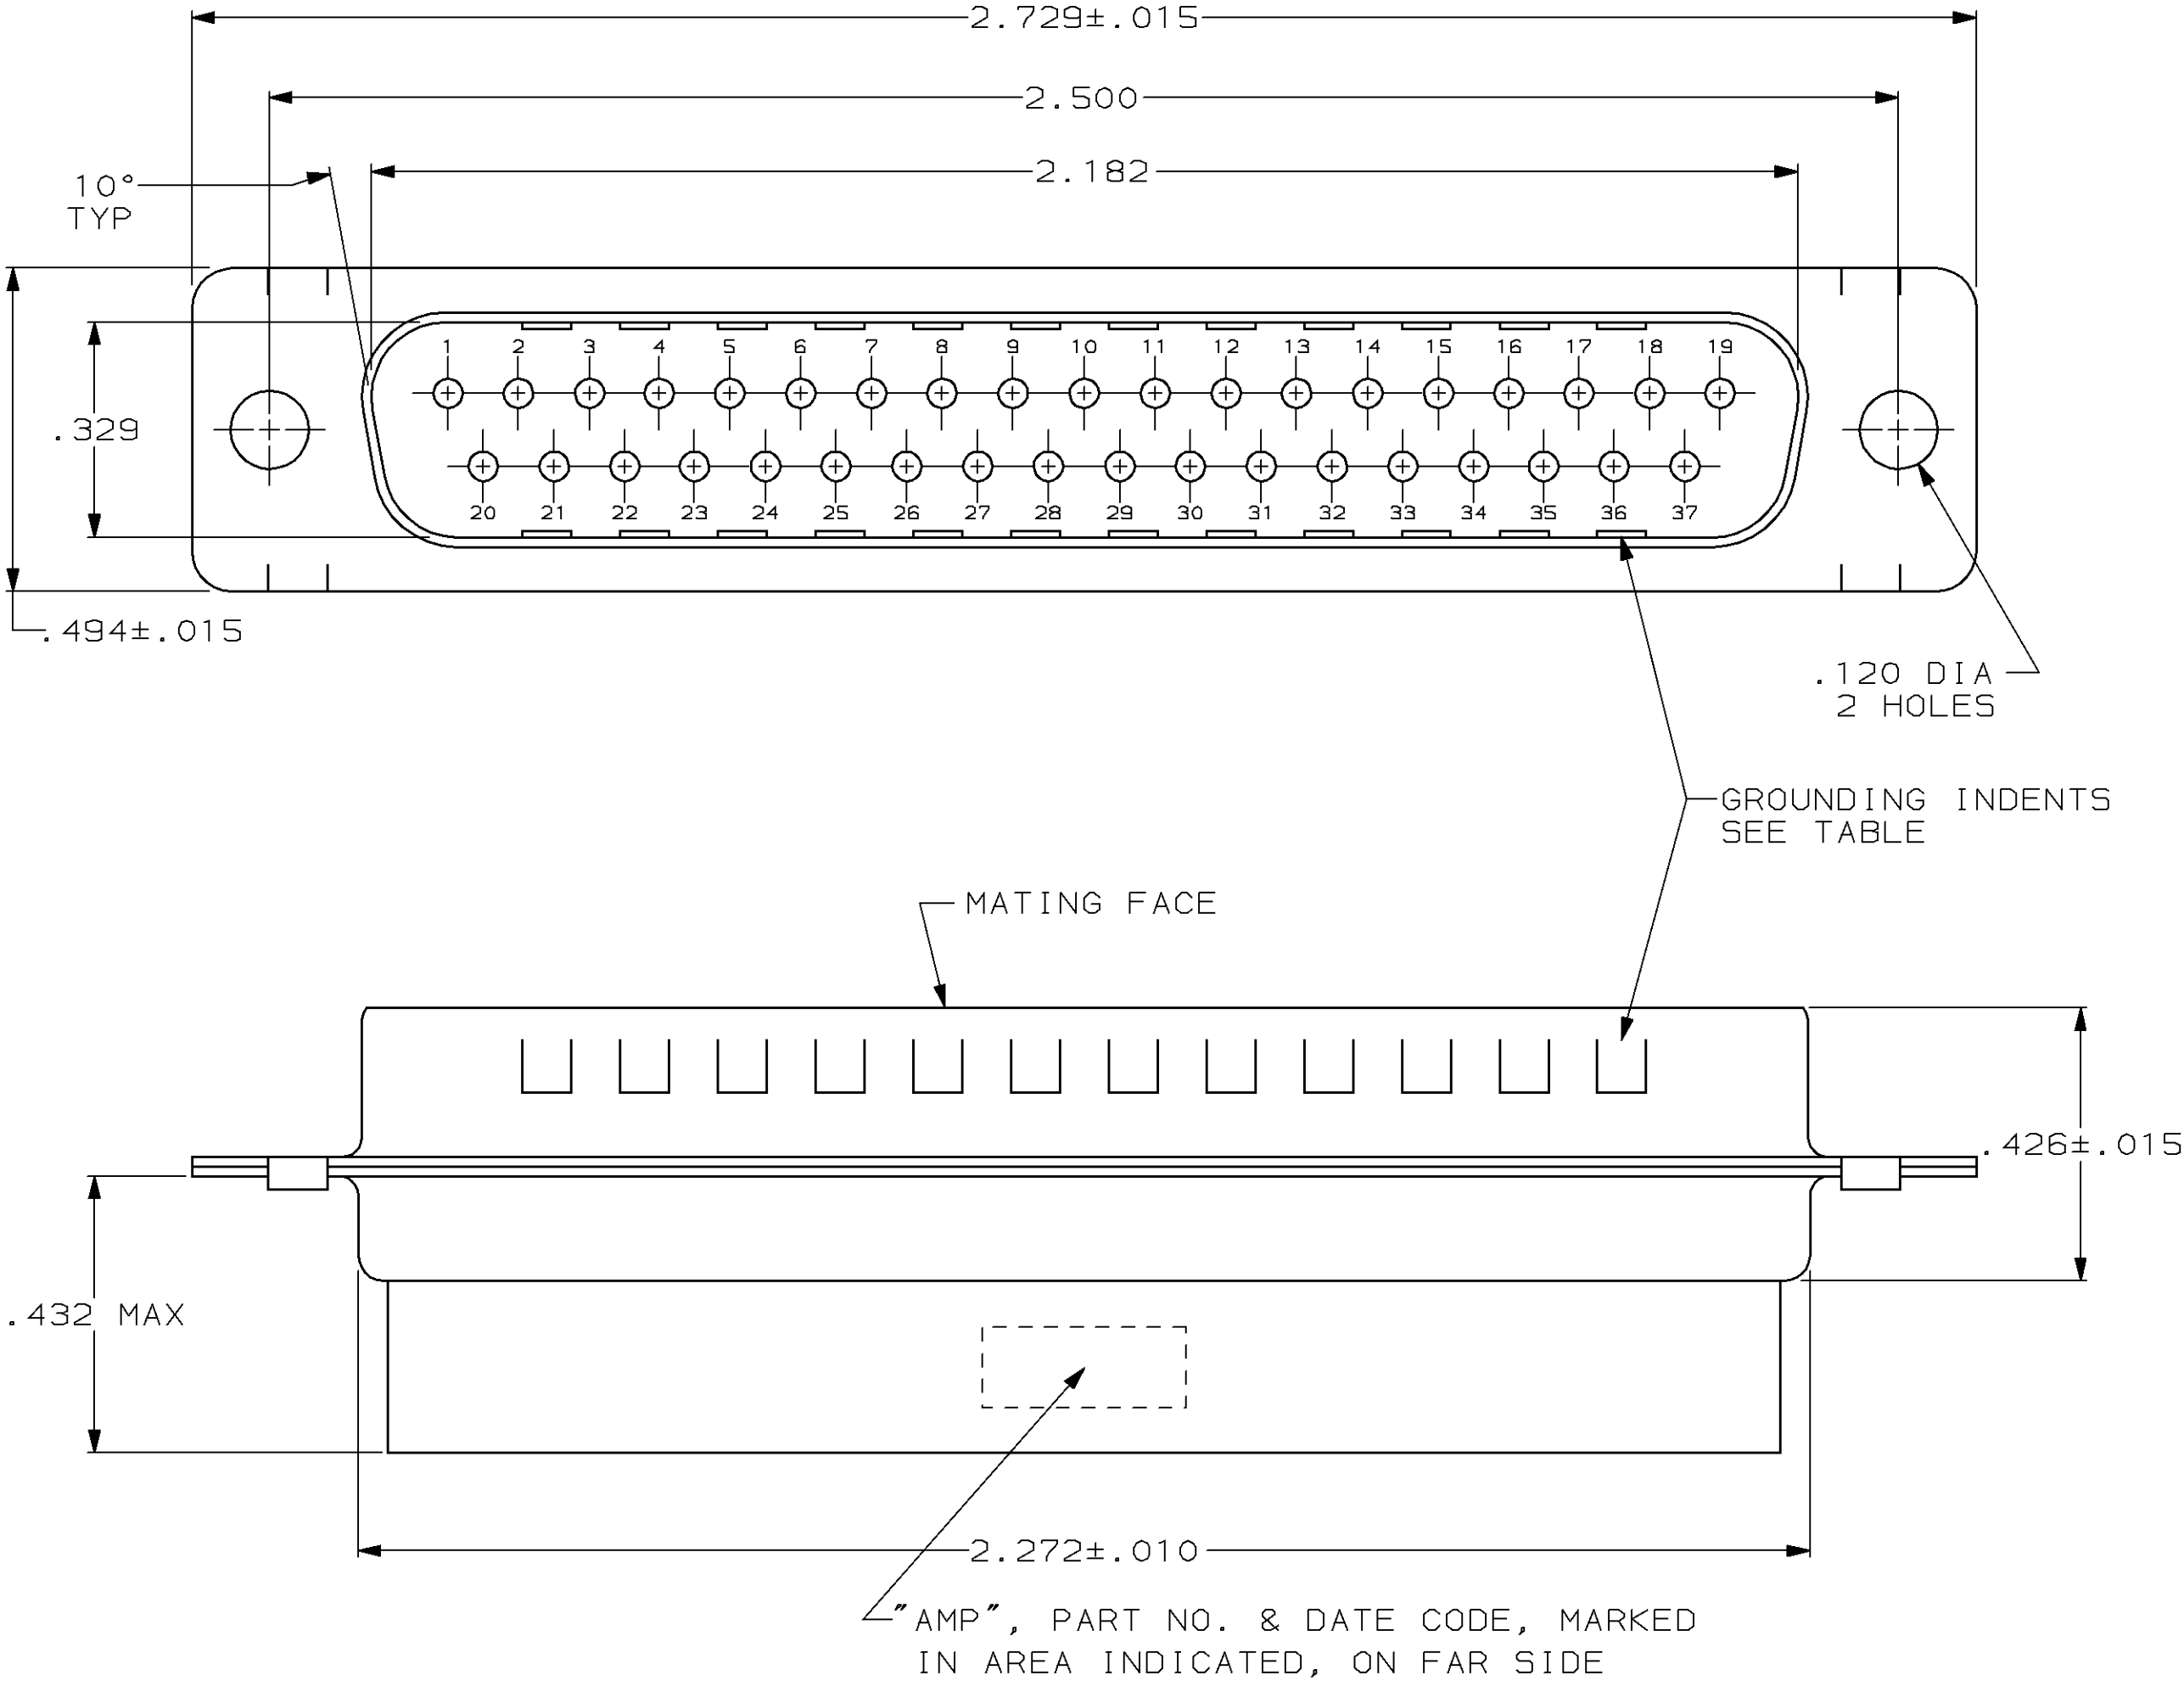

1.

CONNECTOR ACCEPTS SIZE 20 DF PIN CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
2.

CONNECTOR COMPLIES WITH 108-40005 WHERE APPLICABLE.
- 3

NYLON, FLAME RETARDANT, 94V-0 RATED, GLASS FILLED, BLACK.
- 4

STEEL PER ASTM A109.
- 5

ZINC PLATED PER ASTM B633; TYPE II; CLASS SC1; YELLOW CHROMATE.
- 6

TIN OR TIN-LEAD PLATED PER MIL-T-10727.
- 7

TIN PLATED PER MIL-T-10727 OVER COPPER PER MIL-C-14550.

OBSOLETE	SMALL PACK	5	NO	205210-6
	STANDARD	7	YES	205210-3
	STANDARD	6	NO	205210-2
	STANDARD	5	NO	205210-1

PACKAGING TYPE		SHELL FINISH	GROUNDING INDENTS	PART NO
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON : 2 PLC DEC ± 0.13 [.005] 3 PLC DEC ± - ANGLES ± 2°		AMP AMP Incorporated Harrisburg, PA 17105-3608		
MATERIAL MOLDED PARTS: 3 SHELLS: 4		NAME PLUG CONNECTOR, SIZE 4, 37 POSITION, AMPLIMITE™ HDP		
FINISH SHELLS: SEE TABLE		SIZE C	CAGE CODE 00779	DRAWING NO C=205210
WEIGHT -		SCALE 4:1	SHEET 1 OF 1	

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.